# AGRIMAXX

Snowplow with hydraulic wings and angle.
The **AGRI**MAXX pusher is installed in front of a tractor with a universal subframe exclusive to Metal Pless.




| Model | Available Edges | Blade Dimensions | | | Application | Approx. Weight | |
|---|---|---|---|---|---|---|---|
| | | Box | Height | Extended | | | |
| AGLT 0527-10 | ***STD*** | 5' | 27" | 10' | 40-50 HP | 982 lb | 27" |
| AGLT 0627-11 | ***STD*** | 6' | 27" | 11' | 50-60 HP | 1 100 lb | |
| AGLT 0727-12 | ***STD*** | 7' | 27" | 12' | 50-70 HP | 1 165 lb | |
| AGH 0630-11 | ***STD - HD - LE*** | 6' | 30" | 11' | 65-80 HP | 1 446 lb | 30" |
| AGH 0730-12 | ***STD - HD*** | 7' | 30" | 12' | 65-80 HP | 1 501 lb | |
| AGH 0830-13 | ***STD - HD - LE*** | 8' | 30" | 13' | 70-80 HP | 1 556 lb | |
| AGH 0736-13 | ***HD - LE*** | 7' | 36" | 13' | 60-90 HP | 1 868 lb | 36" |
| AGH 0836-14 | ***STD - HD - LE*** | 8' | 36" | 14' | 80-100 HP | 2 000 lb | |
| AGH 0936-15 | ***STD - HD - LE*** | 9' | 36" | 15' | 90-125 HP | 2 110 lb | |
| AGH 0836-16 | ***HD - LE*** | 8' | 36" | 16' | 90-125 HP | 2 200 lb | |
| AGH 1036-16 | ***STD - HD - LE*** | 10' | 36" | 16' | 100-125 HP | 2 188 lb | |
| AGH 1236-18 | ***STD - HD - LE*** | 12' | 36" | 18' | 100-125 HP | 2 380 lb | |
| AGH 0842-15 | ***HD - LE*** | 8' | 42" | 15' | 125 HP and up | 2 427 lb | 42" |
| AGH 0842-16 | ***HD - LE*** | 8' | 42" | 16' | 125 HP and up | 2 502 lb | |
| AGH 1042-17 | ***HD - LE*** | 10' | 42" | 17' | 125 HP and up | 2 582 lb | |
| AGH 1242-19 | ***STD - HD - LE*** | 12' | 42" | 19' | 125 HP and up | 2 768 lb | |

Specs, models and/or model numbers are subject to change.

Also available in




Included:
- Tractor subframe
- Angle and wing hydraulic systems

This system requires 4 sets of oil outlets

Blade Positions

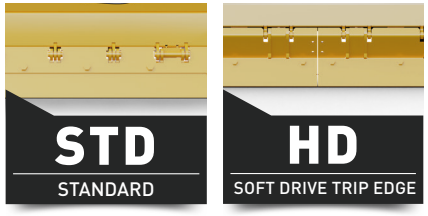

Options (Not included):
- Tire saver (PPLT or PP)
- Nitrogen accumulator package (AAC)
- ¾'' x 6'' teflon cutting edge (TCE¾)
- Electric valve and joystick (JSC4): electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab.
- Electric hydraulic diverter valve 4 sets of oil outlets 12 volts (DVDE3 or DVDE4) 13 or 24 GPM to be specified

The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

# WHY SWITCH TO AGRIMAXX?

## #1 Versatility

Allows you to use a farm tractor year round.

## #2 Easy to Use

Versatile setup that gives you clear visibility and makes maneuvering effortless.

## #3 Cost Savings

The universal subframe lets you switch plows between tractors easily, avoiding the cost of a new subframe.




- Carbide cutting edge (CCE)
- Non standard color (NSC1)
- Curb runners (CR...)

Not included:
- Hydraulic hoses and connectors from the blade to the vehicle

REQUEST QUOTE

# EXPERT OPINION

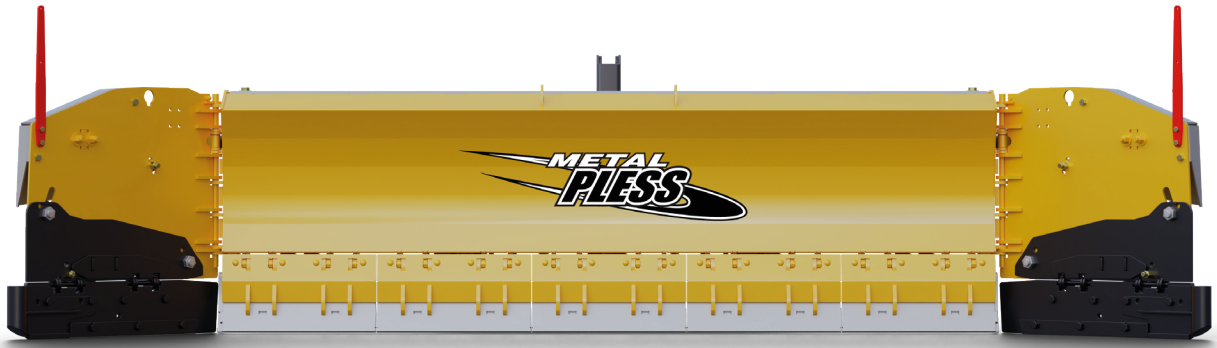"THIS PLOW MAKES A FARM TRACTOR A **SNOWFIGHTER'S DREAM COME TRUE.**

**IT TURNS A MACHINE** THAT WAS ONCE SLEEPING DURING THE WINTER MONTHS **INTO A YEAR-ROUND MONEY MAKER.**

ALONGSIDE ALL THE EXCEPTIONAL FEATURES THAT DEFINE METAL PLESS PLOWS, **IT ALSO INCLUDES A UNIVERSAL SUBFRAME THAT EFFORTLESSLY MOUNTS ON ANY TRACTOR.**

**THE AGRIMAXX SUBFRAME SPREADS THE WEIGHT AND ANY POSSIBLE IMPACT** FROM THE FRONT TO THE REAR OF THE TRACTOR, MAKING THIS PLOW **SAFE AND EFFECTIVE TO USE."**